


上层式放料阀

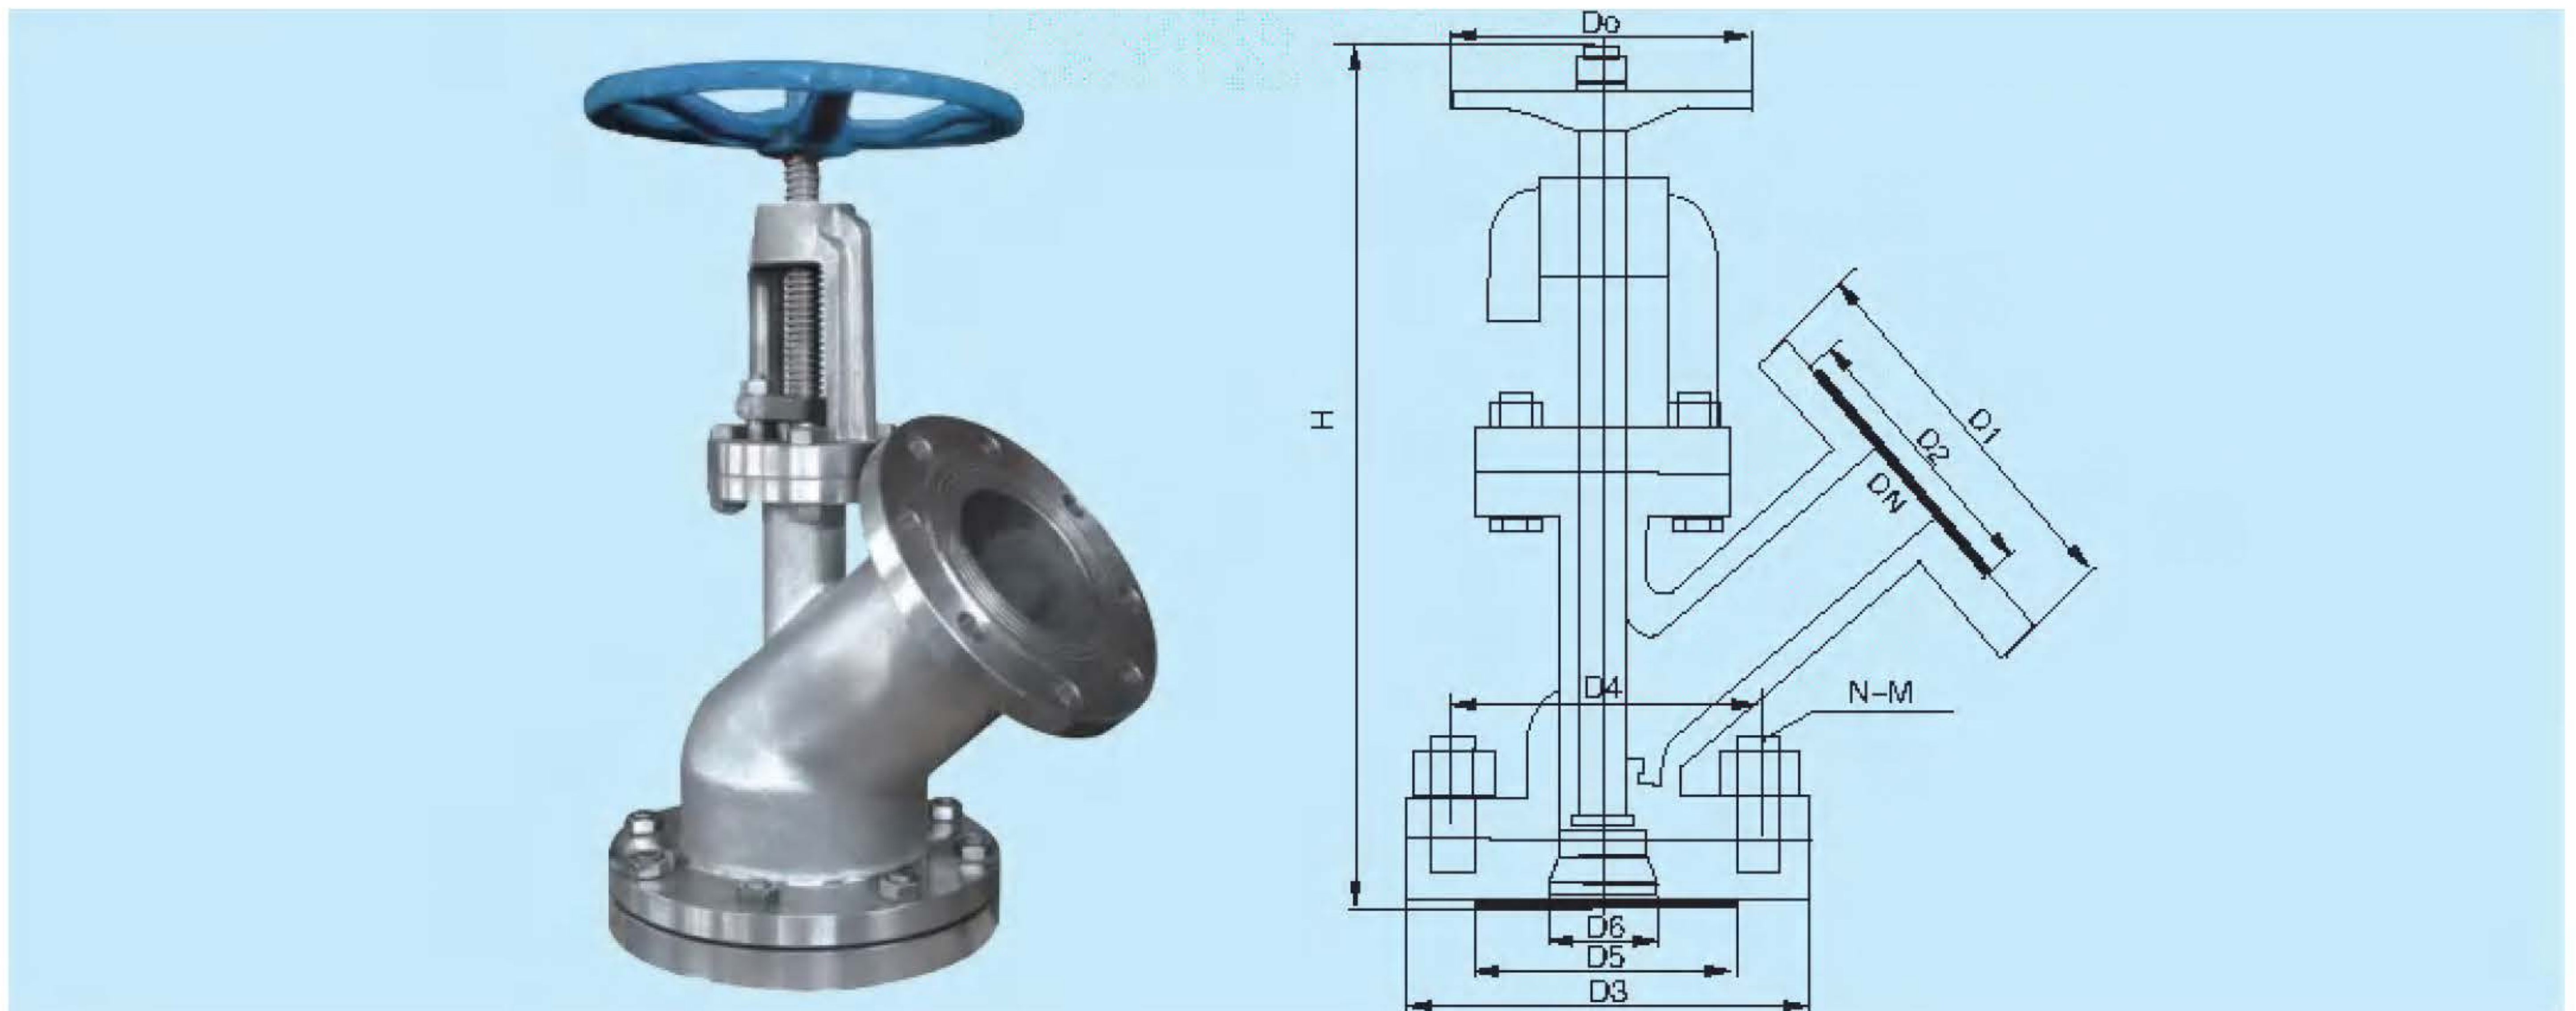

设计制造标准 Design and manufacturing standards

结构长度标准: GB/T12221-2005 Structure length standard	工作压力 1.6MPa Working pressure 1.6 MPa
连接法兰标准: GB/T9113 Connecting flange standards	工作温度为 $\leq 175^{\circ}\text{C}$. 不锈钢 $\leq 320^{\circ}\text{C}$ 碳钢 Working temperature for $\leq 175^{\circ}\text{C}$. Stainless steel $\leq 320^{\circ}\text{C}$ carbon steel
压力温度等级: GB/T12224-2005 Pressure temperature level	工作介质为水, 油液体, 酸碱等 Working medium for water, oil, acid and alkali liquid etc
试验检验标准: GB/T13927-2008 Test inspection standards	

零部件名称及参数 Parts name and parameters

零件名称 Parts name	ZG1Cr18Ni9Ti	ZG00Cr18Ni10	ZG1Cr18Ni12Mo Ti	ZG00Cr17Ni14Mo 2	WCB
阀体 / 阀盖 Body/bonnet	ZG1Cr18Ni9Ti	ZG00Cr18Ni10	ZG1Cr18Ni12Mo Ti	ZG00Cr17Ni14Mo 2	WCB
阀杆 stem	ZG1Cr18Ni9Ti	ZG00Cr18Ni10	ZG1Cr18Ni12Mo Ti	ZG00Cr17Ni14Mo 2	WCB
阀瓣 disc	ZG1Cr18Ni9Ti	ZG00Cr18Ni10	ZG1Cr18Ni12Mo Ti	ZG00Cr17Ni14Mo 2	WCB
垫片 gaskets	304+PTFE	304L+PTFE	316+PTFE	316L+PTFE	graphite+304
螺柱 luozhu	1Cr17Ni2	1Cr17Ni2	1Cr17Ni2	1Cr17Ni2	35CrMoA
螺母 nut	1Cr18Ni9Ti	1Cr18Ni9Ti	1Cr18Ni9Ti	1Cr18Ni9Ti	45

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	上法兰 The flanges			下法兰 Next flange	密封座 Seal seat			
		D1	D2	D3	D4	D5	D6	H	Do
HG5-89-1 16P/R	25	115	80	115	85	-	-	225	160
	32	135	100	135	100	-	-	300	160
	40	145	110	145	110	80	60	340	180
	50	165	125	160	125	85	70	345	180
	65	180	145	180	145	130	85	425	220
	80	195	160	195	160	135	95	445	250
	100	215	180	215	180	160	130	535	280
	125	245	210	245	210	160	140	585	300
	150	280	240	280	240	185	165	665	360
	200	335	295	335	295	/	/	800	500