


自动调节蝶阀

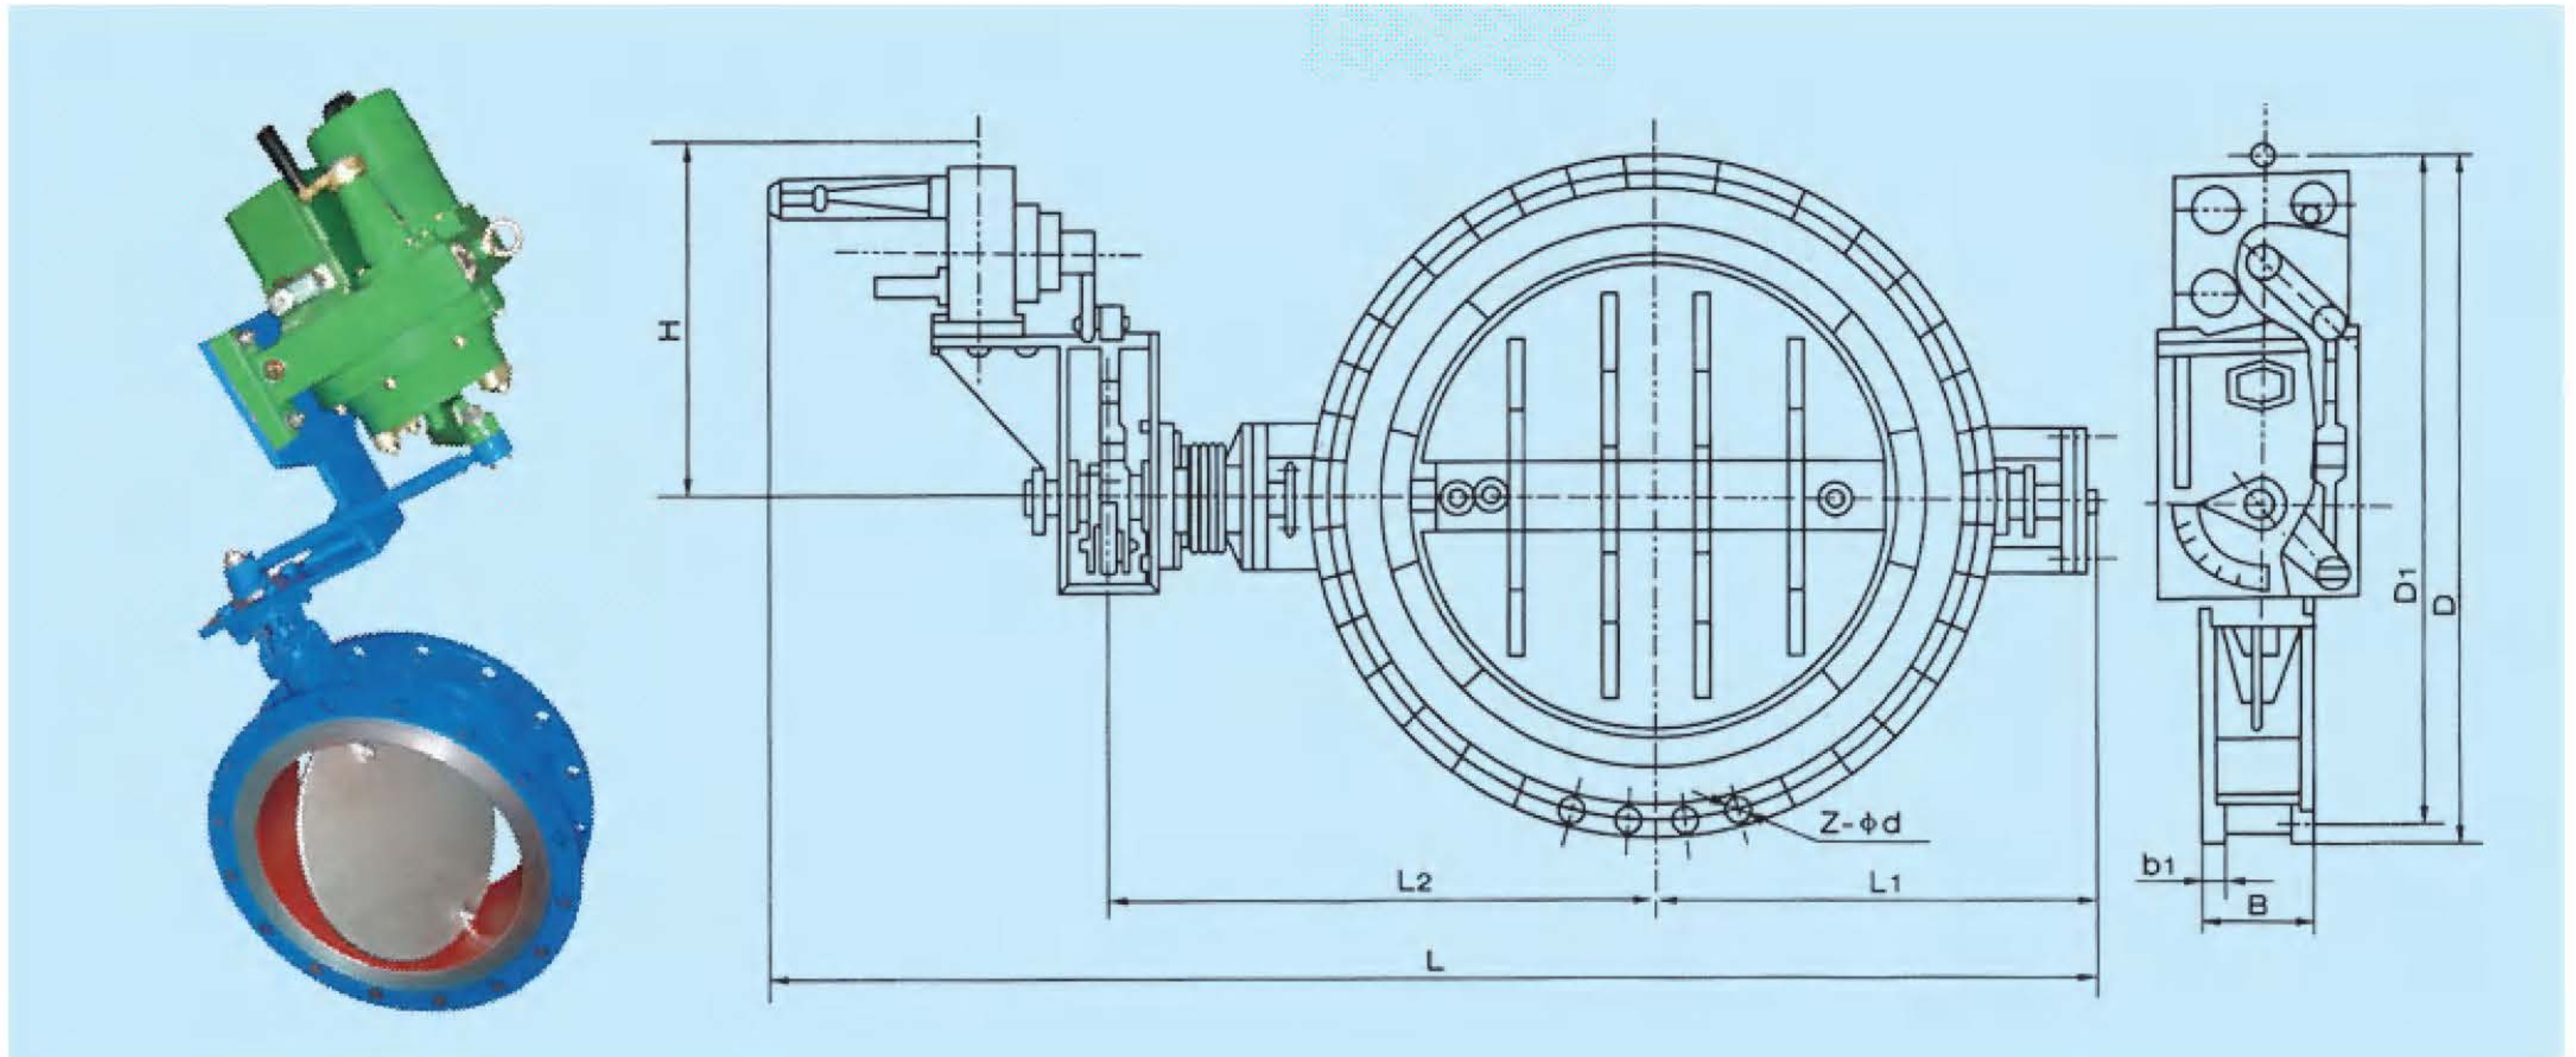

主要性能规范 Main performance standard

型号 Type	PN/MPa	MPa		适用介质 Applicable medium	适用温度 /°C Applicable temperature
		壳体试验 Shell test	密封试验 Seal test		
D9Z41W-0.5JC	0.05	0.15	0.055	含尘烟气、烟气、空气等 Qi, smoke, and containing survive the air	-10~350
D9Z41W-0.5JMn					450~650

主要零件材料 The major parts material

型号 Type	零件名称 Parts name	蝶板、支架 Butterfly plate, support	阀杆 stem	填料 packing
	阀体 body			
D9Z41W-0.5JC	Q235A	Q235	40Cr	柔性石墨 Flexible graphite
D9Z41W-0.5JMn	Q235A- 高铝耐火砖衬里 High aluminum refractory lining		耐热不锈钢 Heat-resistant stainless steel	

主要外形尺寸 (mm) Main External and Connection Dimension

Dn	D1	D	H	L1	L2	L	b	Z-φd	B
100	145	180	333	231	162	160	6	4-φ14	215
150	195	230		256	187	160	6	8-φ14	
200	213	280		281	212	160	8	8-φ14	
250	305	350		306	237	160	8	12-φ18	
300	355	400	336	346	277	180	6	12-φ18	300
350	405	450		371	313	180	6	12-φ18	
400	455	500		396	333	200	6	16-φ18	
450	505	550		421	363	200	6	16-φ18	
500	555	600	516	400	388	220	10	20-φ18	365
550	605	650		425	414	220	10	20-φ18	
600	655	700		450	433	220	10	20-φ18	
650	705	750		475	485	220	10	20-φ18	
700	755	800		500	510	240	10	20-φ18	